


Plan View

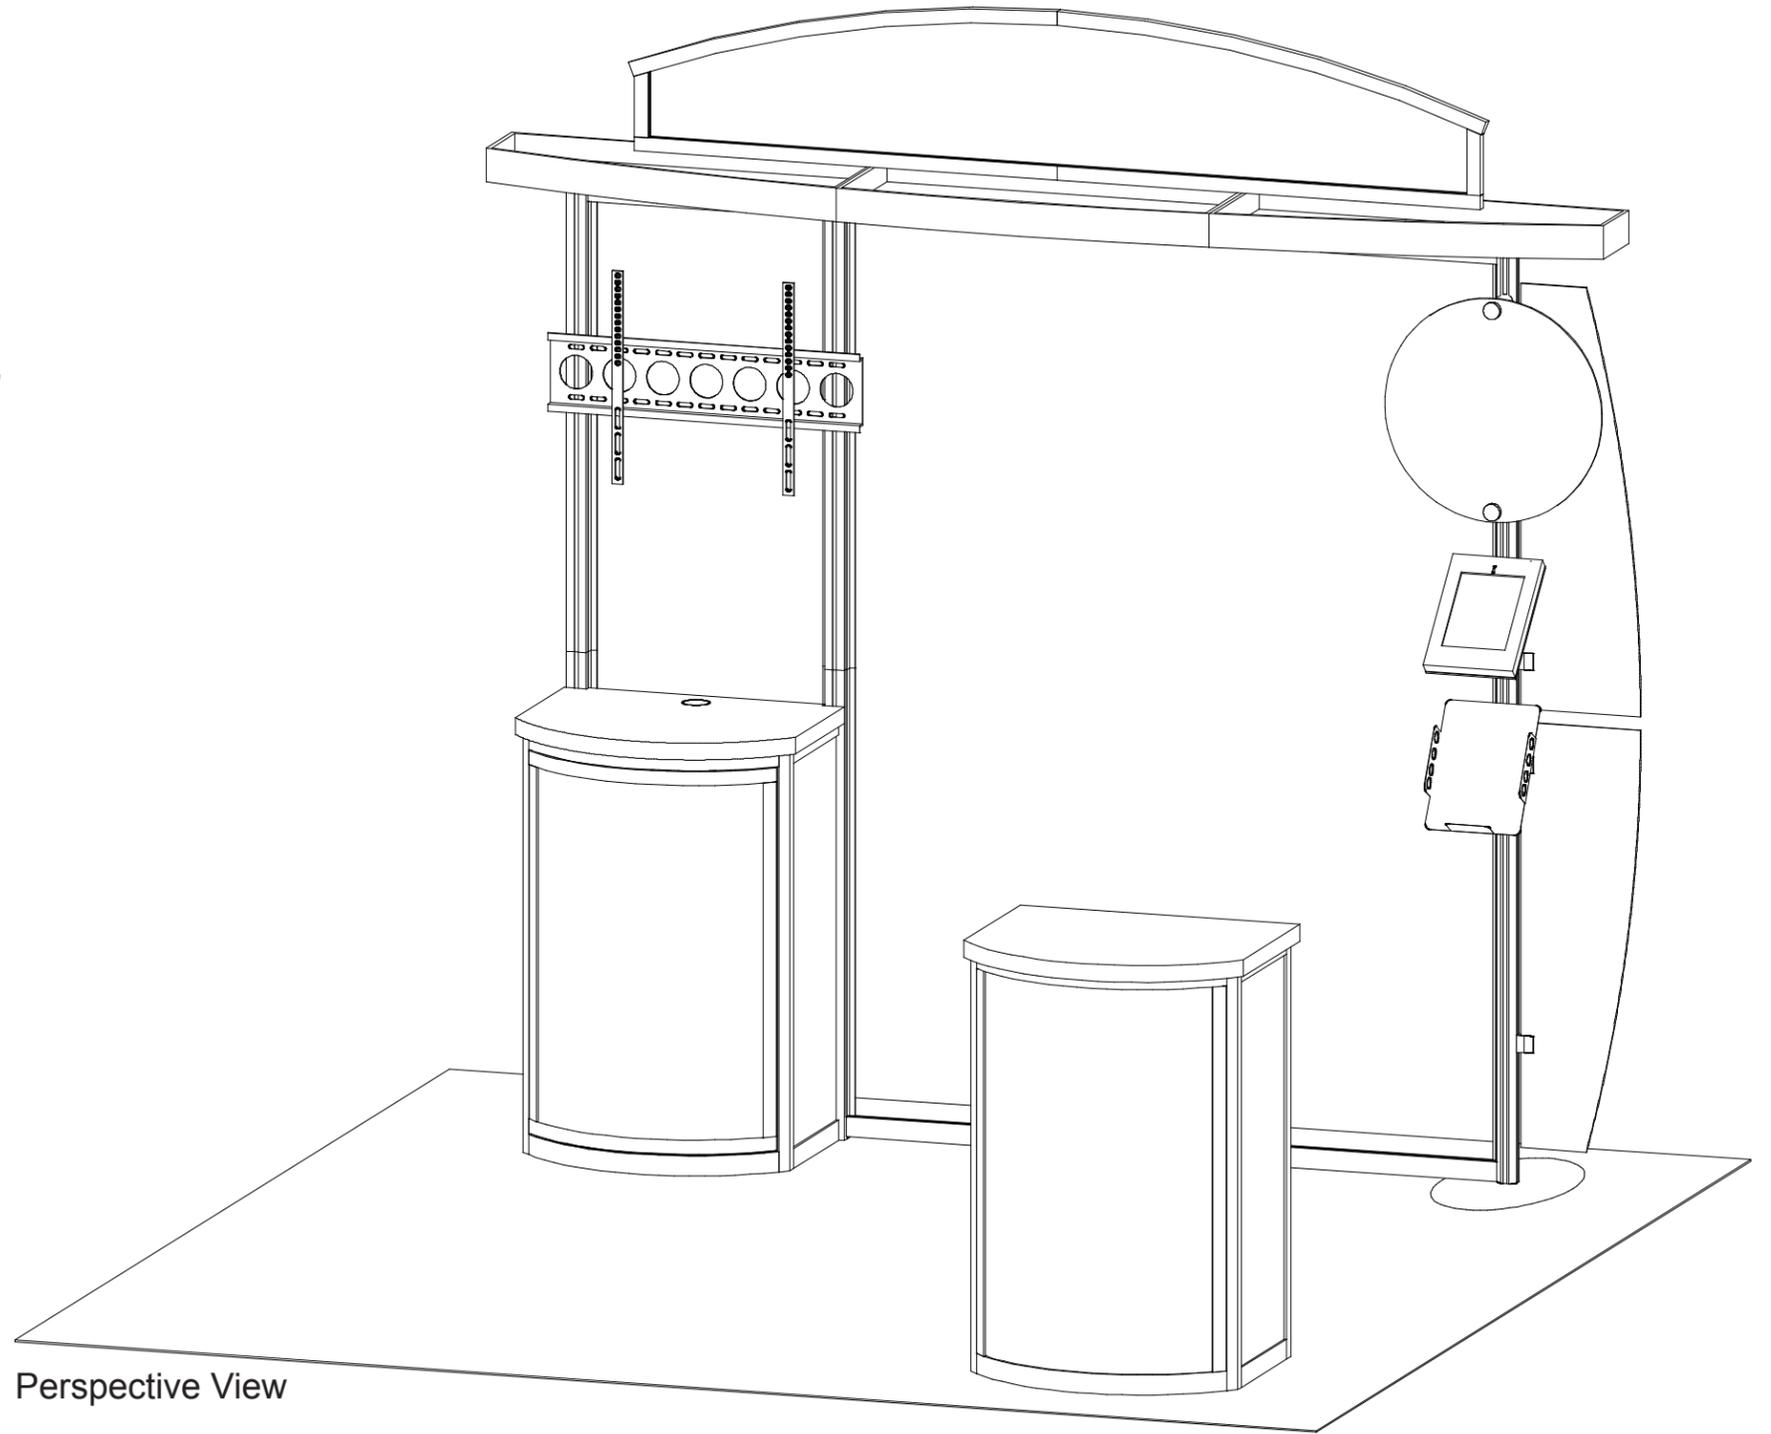

Perspective View

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

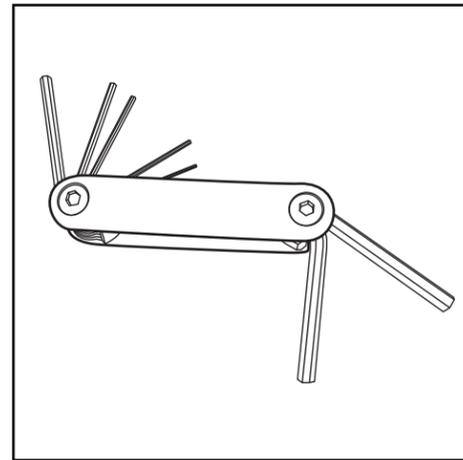


Hex Tool - Essential for Assembly

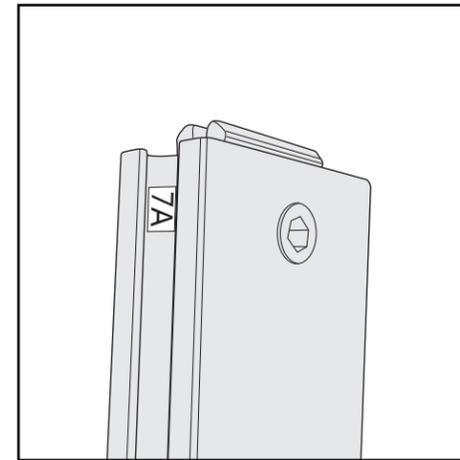


Part Identification - Numbering

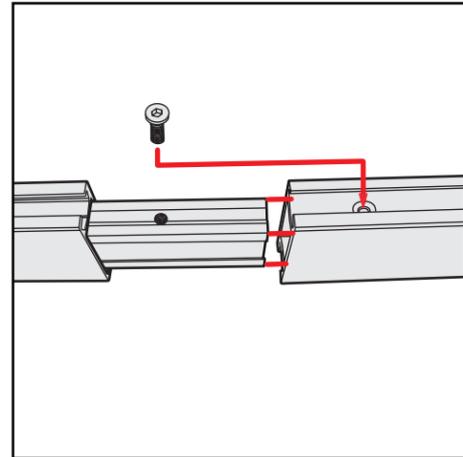


Spline Connection

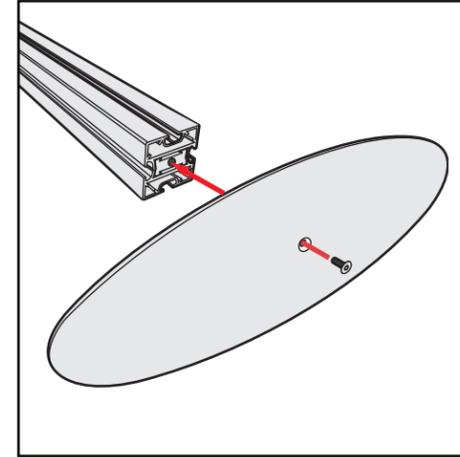

Base Plate & Extrusion Connection

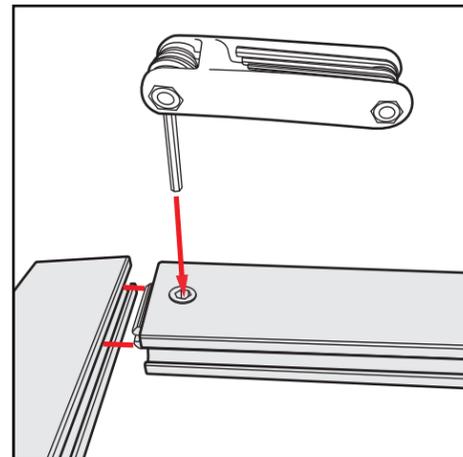

Extrusion & Lock Connection

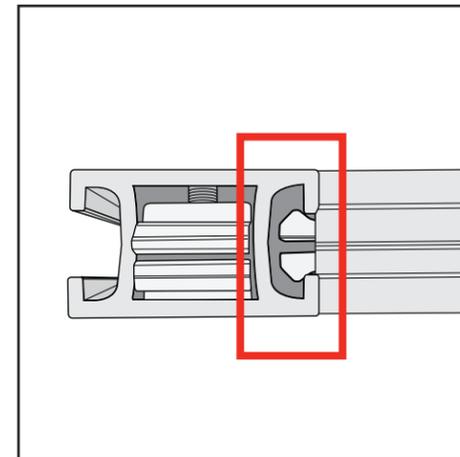

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Top View of Each Level

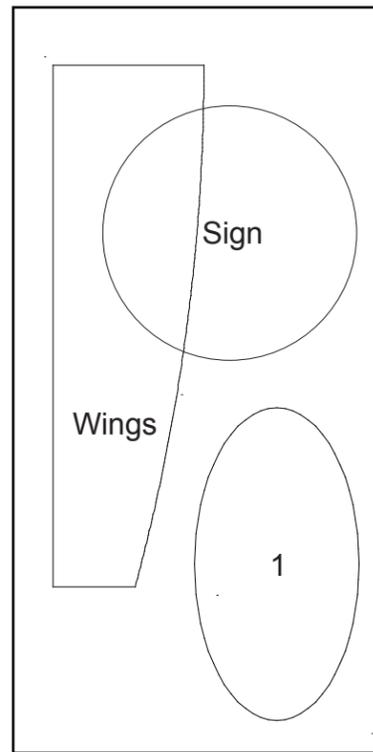


Level 1

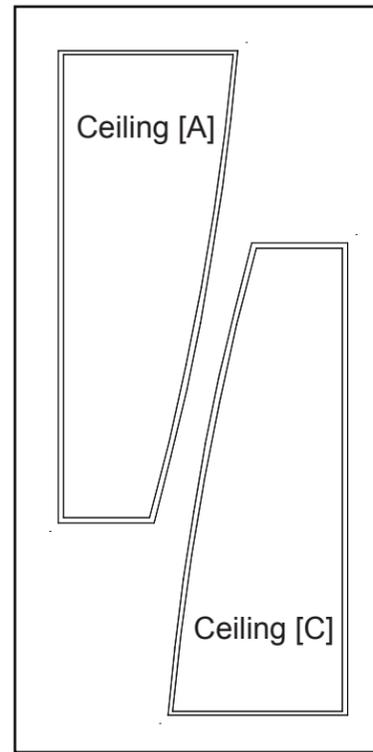


Level 2

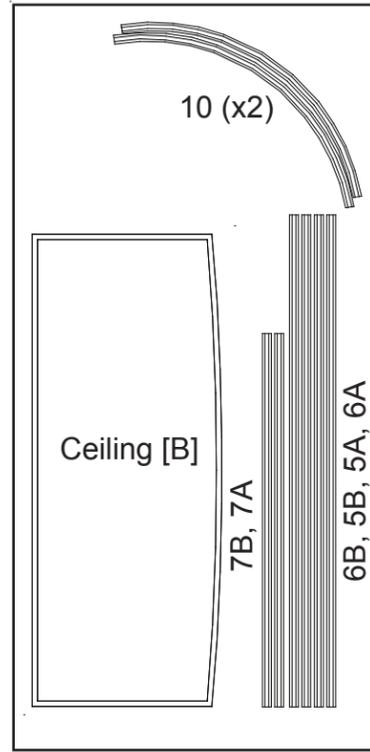


Level 3

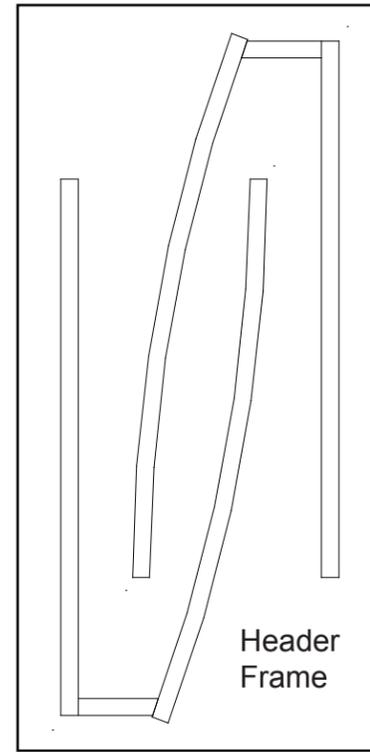


Level 4

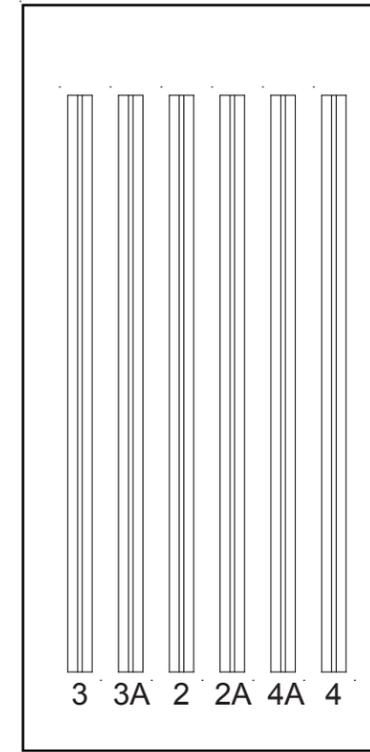


Level 5

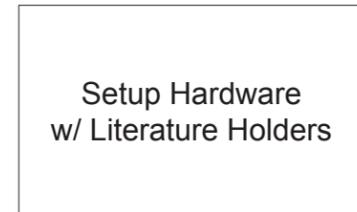

Top View of Each Level

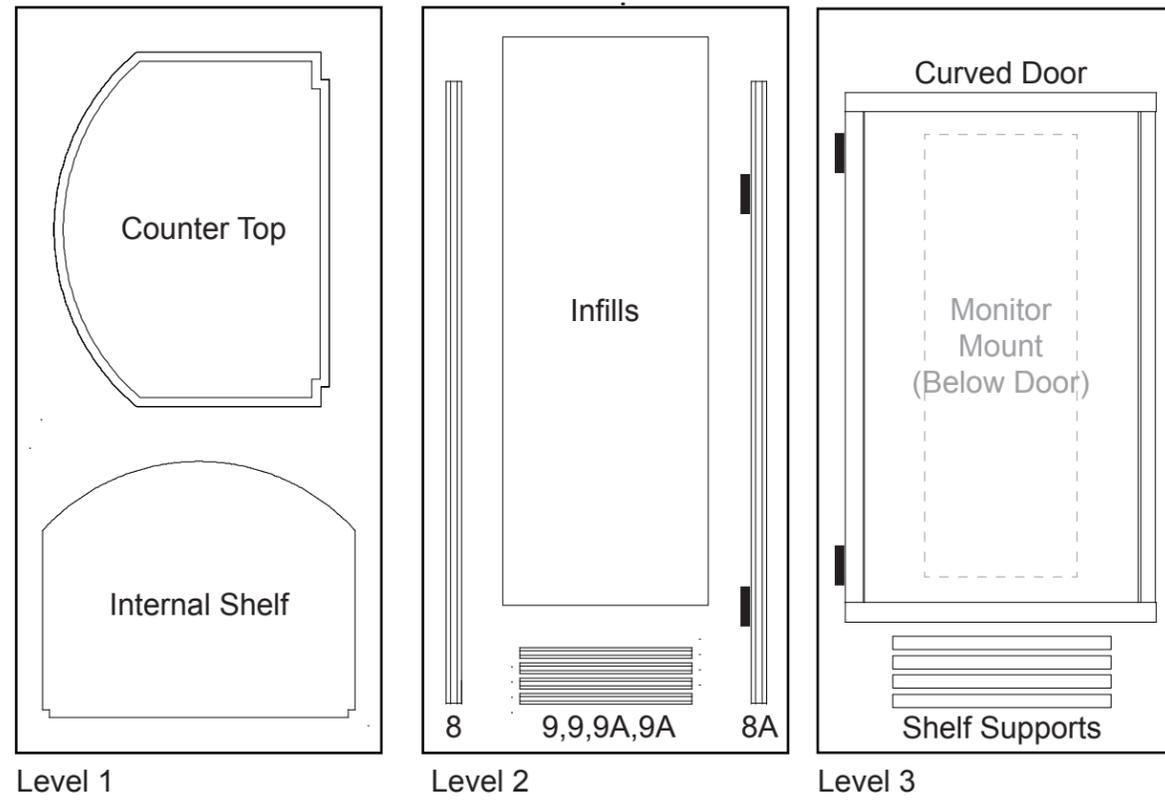


Top View of Each Level

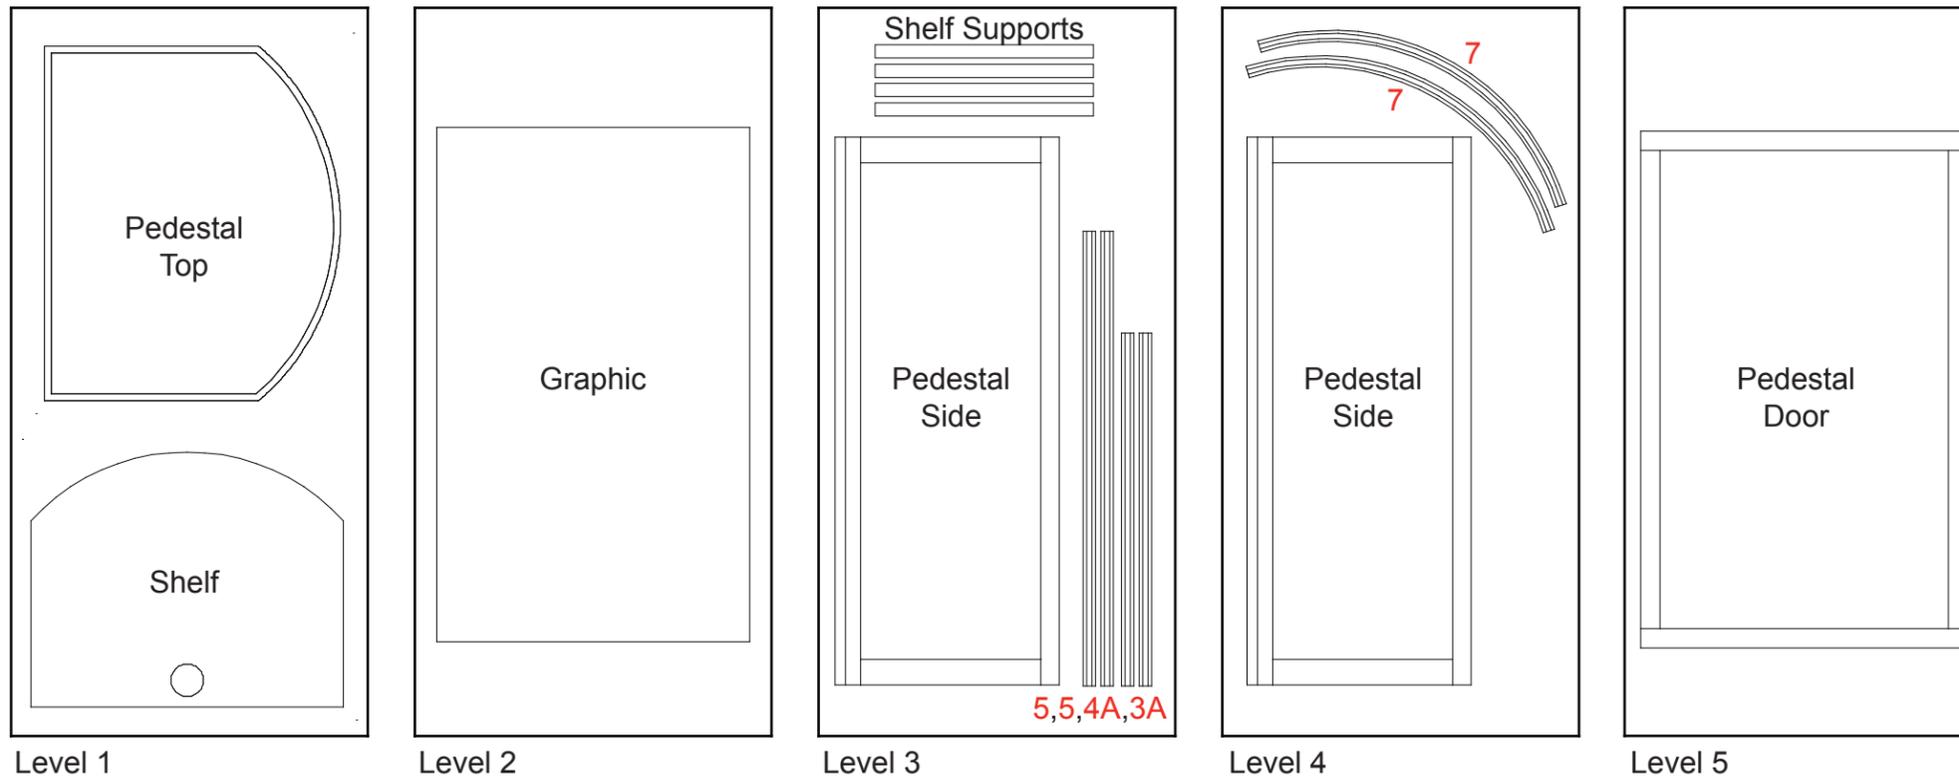



Item	Qty.	Description
1	1	Base Plate
2/2A	1/1	42" S44 Vertical Extrusion
3/3A	1/1	42" S44 Vertical Extrusion
4	1	41.75" S44 Vertical Extrusion
4A	1	42" S44 Vertical Extrusion
5A/5B	1/1	30" Z45 Horizontal Extrusion
6A/6B	1/1	30" Z45 Horizontal Extrusion
7A/7B	1/1	22" Z45 Horizontal Extrusion

Steps:

- 1) Attach lower Vertical Extrusion [4] to Base Plate [1], using bolt.
- 2) Attach upper Vertical Extrusions [2A,3A,4A] to lower Vertical Extrusions [2,3,4]
- 3) Connect Horizontal Extrusions [5A & 5B] [6A & 6B] together.
- 4) Attach Horizontals [5A/5B] [6A/6B] & [7] between Vertical Extrusions, as shown.
- 5) Connect graphics to **Velcro** on back of assembled Backwall.

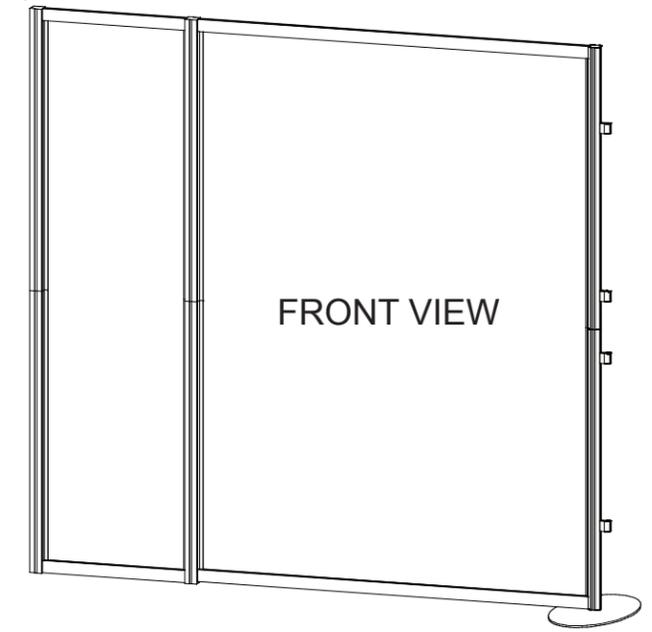


Completed Backwall Assembly

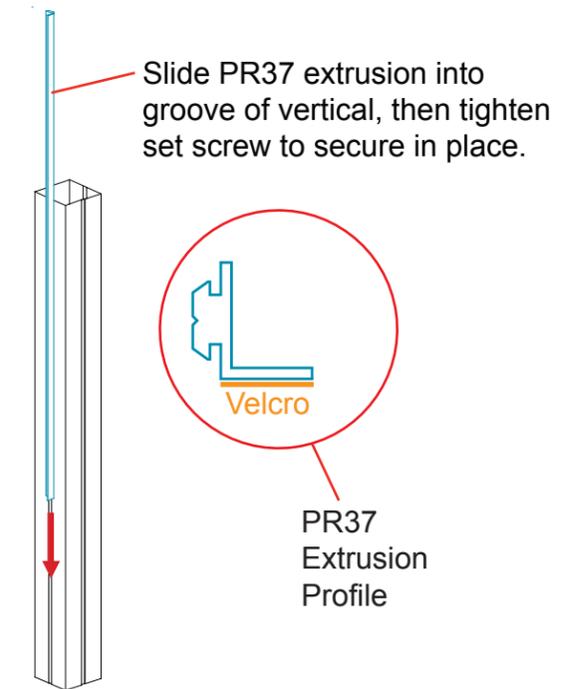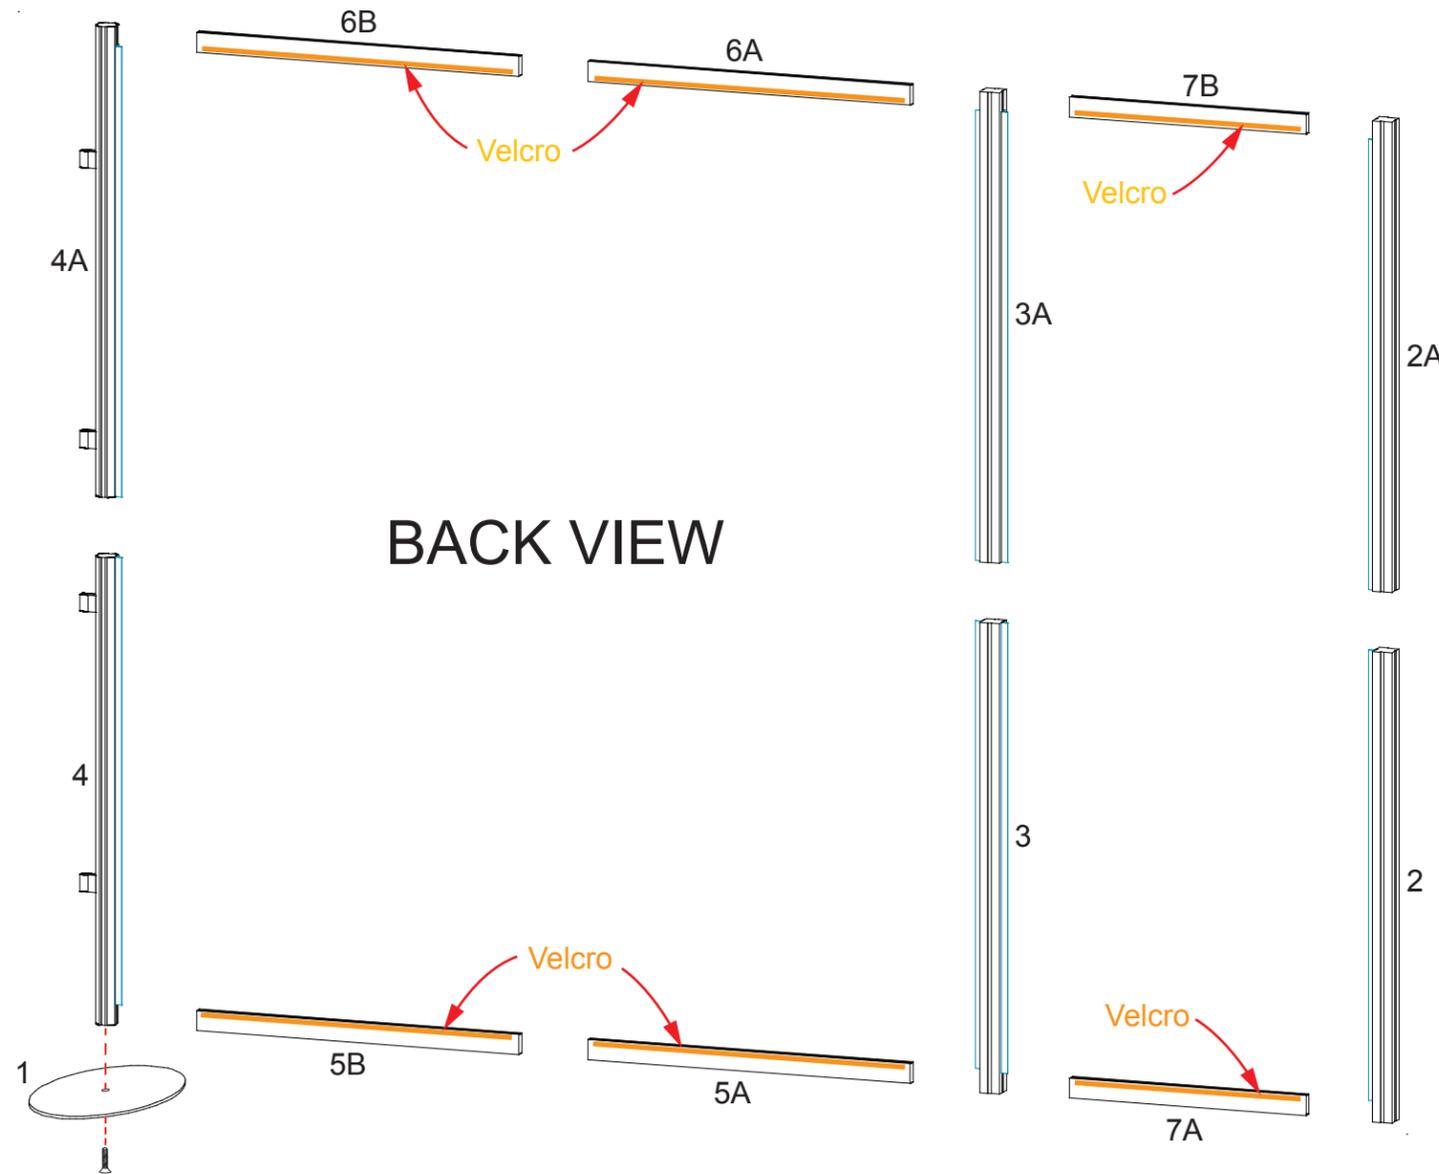


Item	Qty	Description
8/8A	1/1	38" Vertical Extrusion
9/9A	2/2	12.5" Horizontal Extrusion
10	2	Curved Extrusion

Steps




- 1) Attach horizontal extrusions [9] [9A] [10] between vertical extrusions [2] [3] [8] & [8A], inserting **Infills** as shown.
- 2) Attach door to vertical extrusion [8A]. See **Door Connection** detail.
- 3) Connect **shelf supports** with Velcro to inside of cabinet base, then set self on top of supports.
- 4) Place cabinet top on top of assembled cabinet base. See **Cabinet Top Attachment** detail.

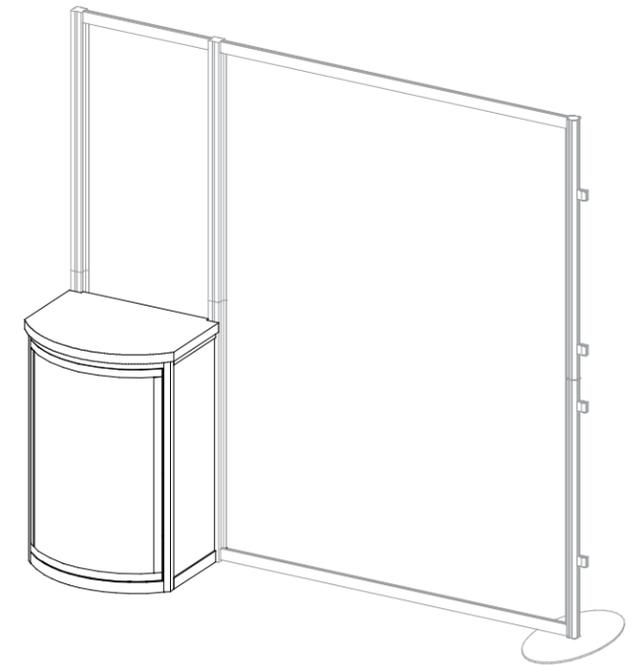

Completed Counter Assembly

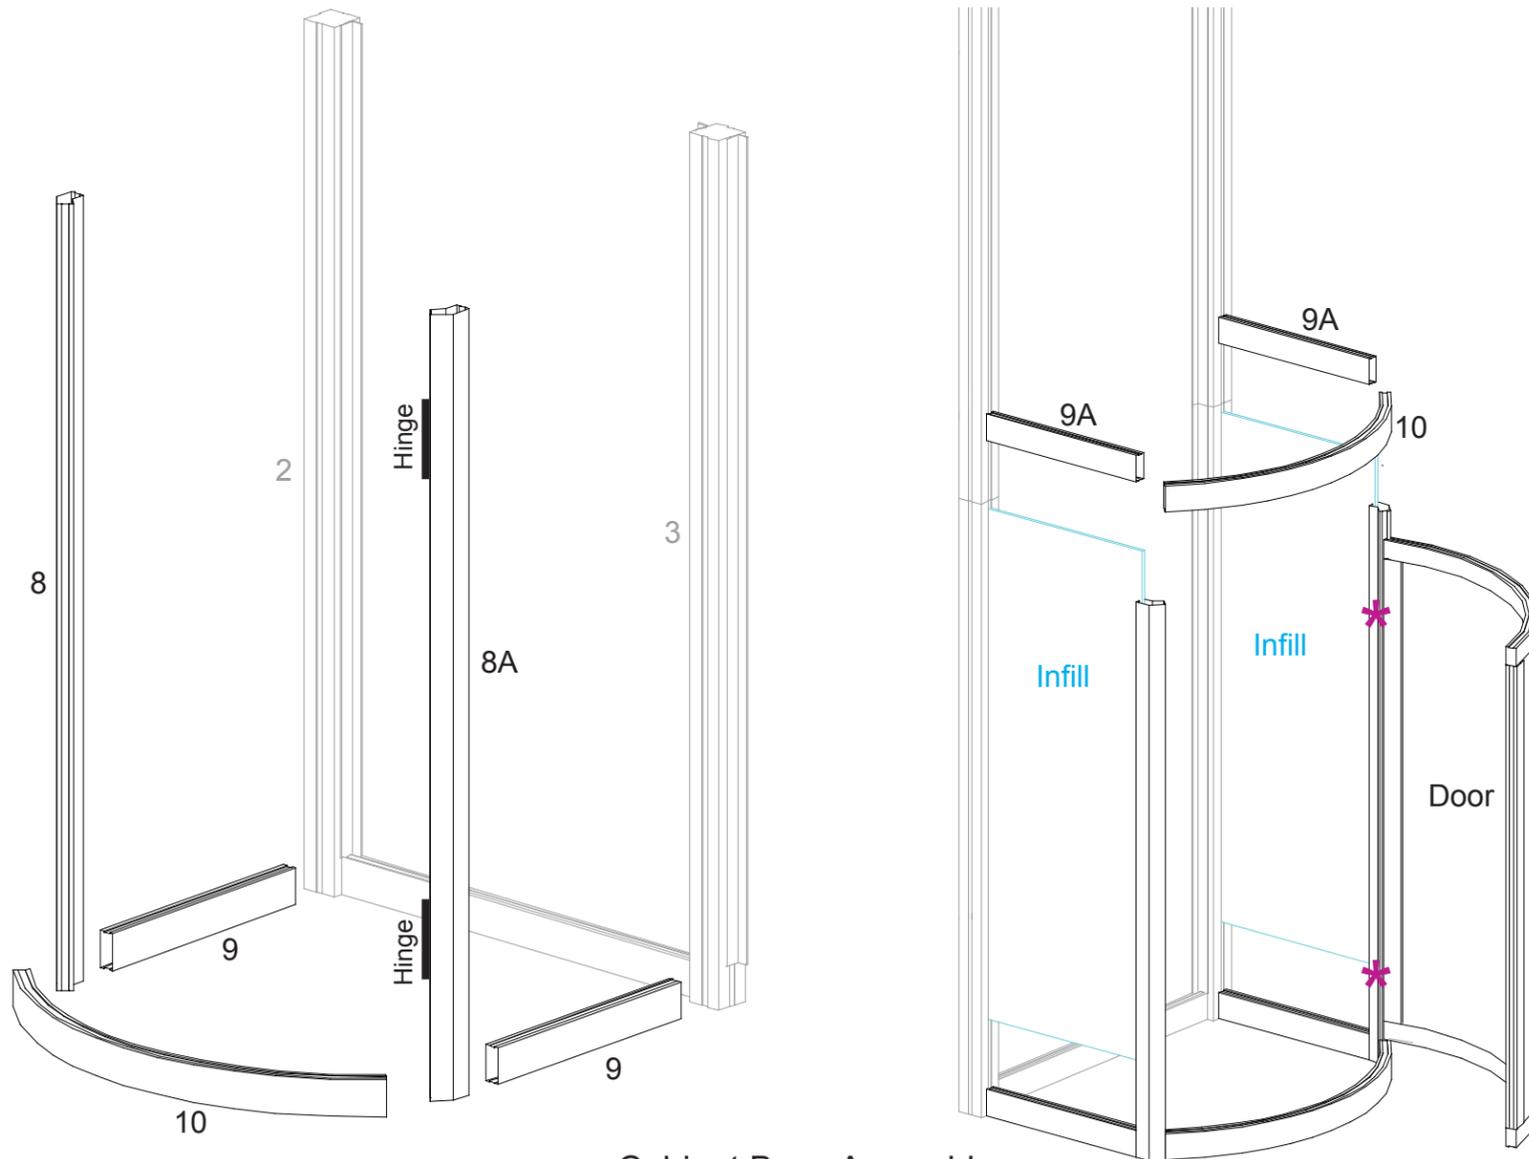








Cabinet Base Assembly

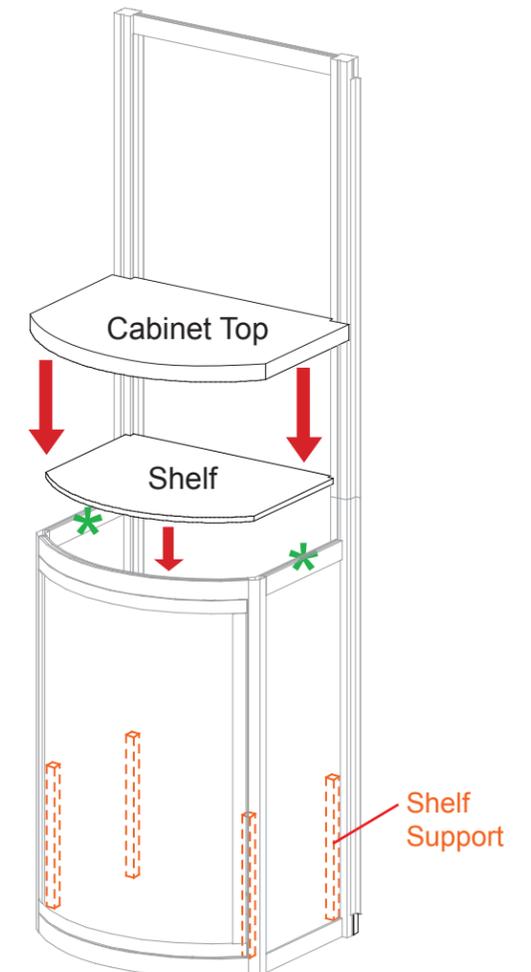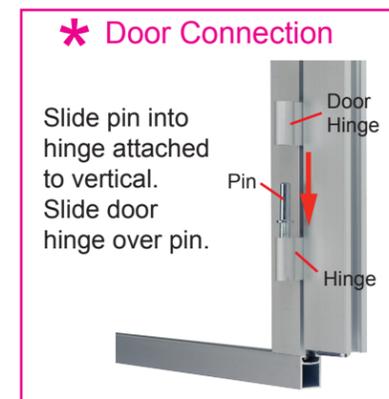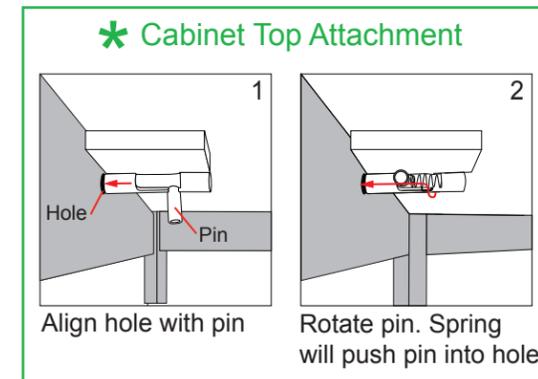

Item	Qty.	Description
11A/11B	1/1	5.862" Vertical Extrusion
12A/12B	1/1	40.319" Curved Horizontal Extrusion
13A/13B	1/1	39" Horizontal Extrusion

Steps


- 1) Connect ceiling pieces [A] [B] & [C] together. See **Ceiling Connection** detail.
- 2) Connect assembled header pieces together.
- 3) Attach assembled header to assembled ceiling, using hex bolts. See **Header Attachment** detail.
- 4) Attach assembled ceiling & header on top of assembled backwall, using bolts.
- 5) Attach wings, using A10 clamps. See **A10 Clamp** detail.
- 6) Attach sign to vertical [4A], using standoff barrels and caps.
- 7) Connect graphic to Velcro on back of assembled header.
- 8) Attach monitor mount to verticals [2A] & [3A]. See **Monitor Mount Attachment** detail.
- 9) Attach iPad mount to vertical assembly [4/4A]. See **iPad Mount Attachment** detail.
- 10) Attach literature holders to vertical assembly [4/4A]. See **Literature Holder Attachment** detail.

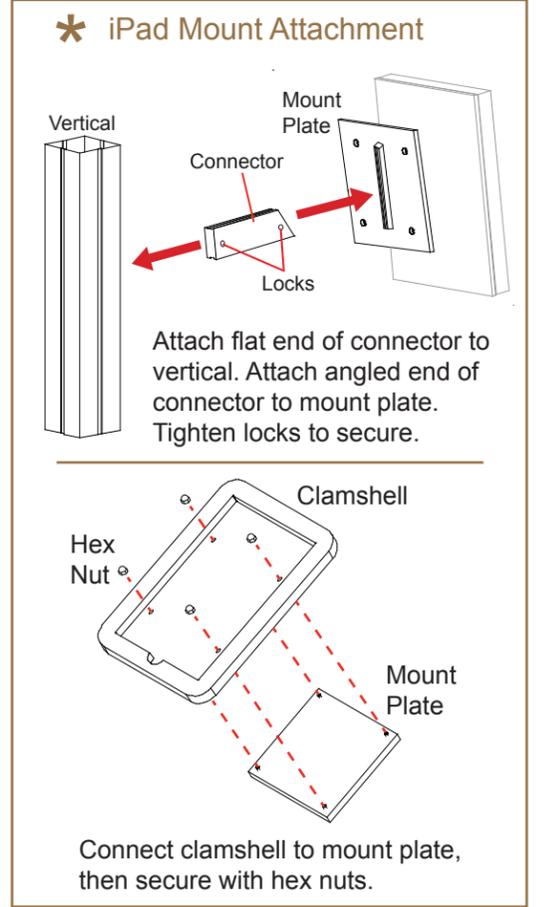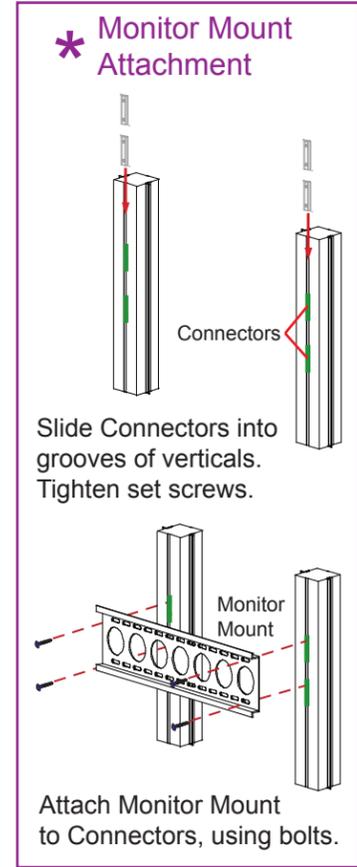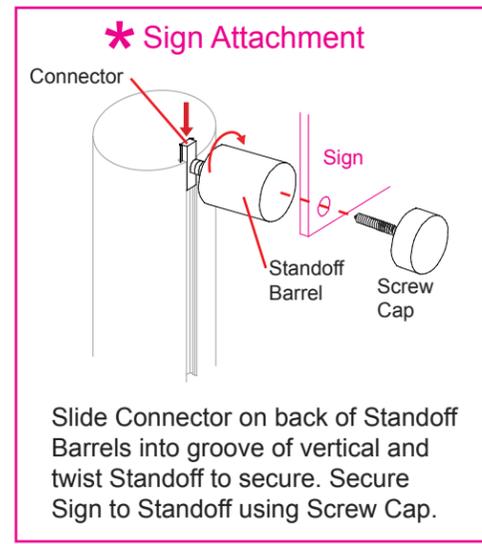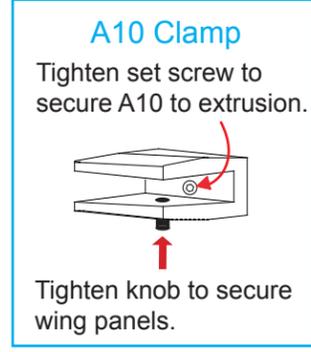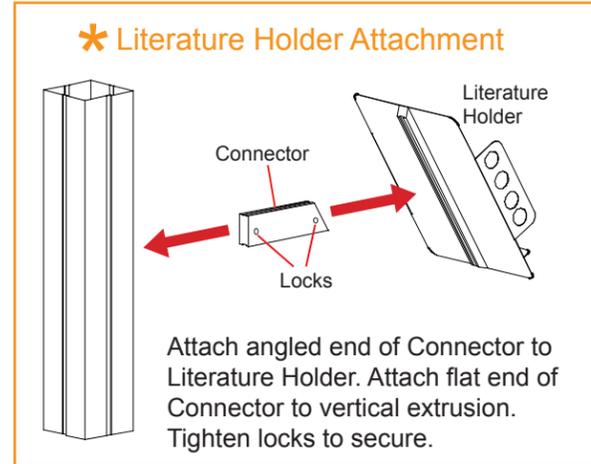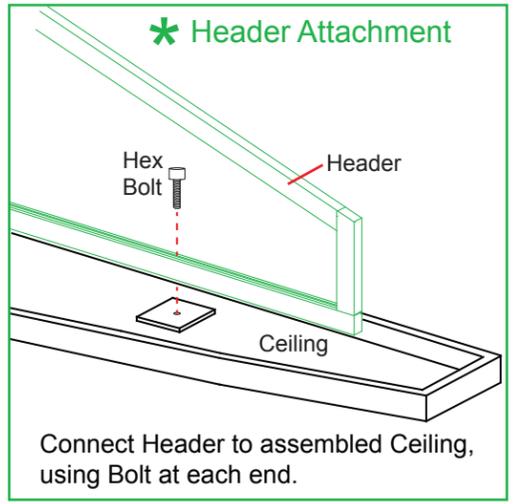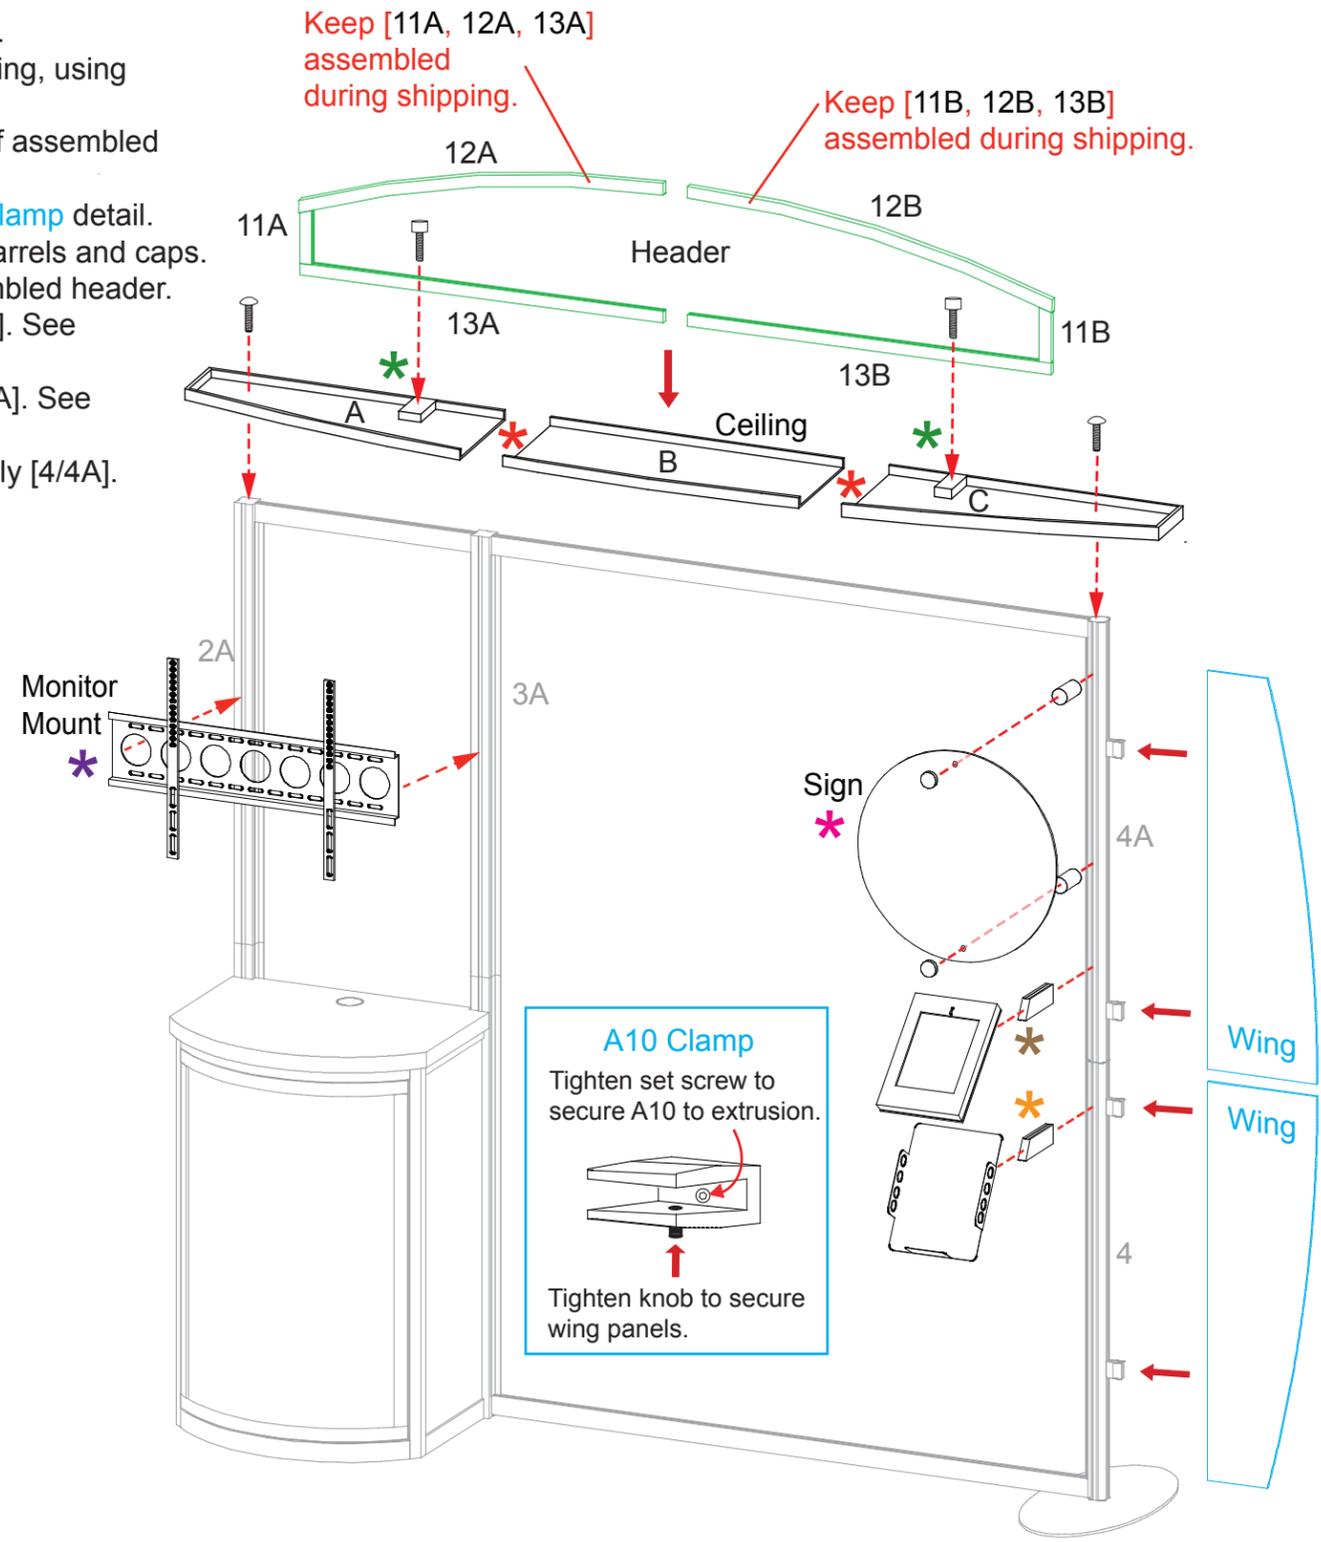

Item	Qty.	Description
1	1	38" Vertical Extrusion w/ Door Hinges
2	1	38" Vertical Extrusion w/ Door Stop
3	1	38" Vertical Extrusion
3A	1	34.417" Vertical Extrusion
4	1	38" Vertical Extrusion
4A	1	34.417" Vertical Extrusion
5	2	22.0197" Horizontal Extrusion
6,6A	2,2	12.5" Horizontal Extrusion
7	2	25.639" Curved Extrusion

Steps

- 1) Attach horizontal extrusions [5] & [7] between assemblies [1,4,6,6A] & [2,3,6,6A].
- 2) Connect vertical extrusions [3A] & [4A] on top of horizontal extrusion [7].
- 3) Slide **Infill** between verticals [3A] & [4A].
- 4) Attach assembled door to vertical extrusion [1]. See **Door Connection** detail.
- 5) Attach upper horizontal extrusions [5] & [7] between assemblies and on top of **Infill** & Door.
- 6) Connect Velcro on shelf supports to inside of assemblies then set shelf on top of supports.
- 7) Attach pedestal top to extrusions [6A]. See **Pedestal Top Attachment** detail.

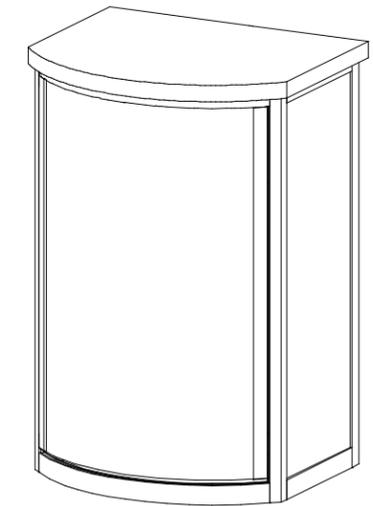

Completed Assembly

